

**COMPACT.
RELIABLE.
ECONOMICAL.**

*A new take on a classic workhorse,
The PAR EverServ® 550.*



Maximize space and savings with the sleek and economical PAR EverServ® 550 POS terminal.

PAR EverServ 550 POS hardware is built with the same rugged durability PAR is known for but in a compact design that delivers the performance and reliability you need. Its small footprint is ideal for installations where space is at a premium. The design offers a spill resistant, high-impact enclosure that is built to withstand tough restaurant and retail conditions with continuous operation. The EverServ 550's fan-less design is quiet, offers less power consumption and minimizes maintenance.



Space Saving Design

The 550's small footprint frees up counter space, cable routing to the POS, top of the counter and under counter connections keep the POS environment clutter free.

Durable and Reliable

The EverServ 550 is built to perform in harsh environments that involve rough treatment and liquid spills. The 550 has a shock mounted hard disk, spill resistant case work and a sealed touch screen to provide real-life environmental protection and long-life.

Low Total Cost of Ownership

Advanced energy saving features like the fan-less design and auto-standby mode dramatically reduce overall power consumption. The 550's durable and reliable design extends the life and terminal and lowers the total cost of ownership

Operating Systems

- Windows Embedded POSReady 7 (32/64b)
- Windows 7 Professional (32/64b)
- Windows 8.1 Industry Pro (32/64b)
- Windows 8.1 Pro (32/64b)
- Windows 10 Embedded/Pro (32/64b)

Processor, Memory, Storage and LAN

Processor

- Intel® Celeron™ Bay Trail Family J1900 2.4 GHz
- Quad core

Memory

- DDR3 2 GB or 4 GB Options

Storage Options To Choose

- 2.5" 500 GB Hard Disk Drive (HDD)
- 2.5" 64 GB Solid State Drive (SSD)
- 2.5" 128 GB Solid State Drive (SSD)
- 2.5" 256 GB Solid State Drive (SSD)

LAN

- 10/100/1000 Mbit Ethernet

Size & Weight

Screen

Width: 15.4 inches (39.1 cm)

Base

Height: 13.4 inches (40.0 cm)

Width: 9.5 inches (24.1 cm)

Depth: 8.2 inches (20.8 cm)

Weight: 12 lbs. (5.4 kg)



Ports & Expansions

5 USB

- 4 USB V2.0 Ports
- 1 USB V3.0 Port


3 COM Ports RJ 45

- 5v and 12v configurable options

1 RJ 12 Cash Drawer Port

1 RJ45 LAN 10/100/1000Mbit

1 2nd Independent Video Port (VGA)

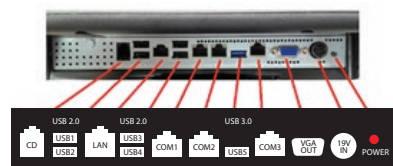

Built-in Features

- 3 Track MSR (USB)
- 2x20 Customer Facing LCD Display



LCD & Touchscreen

- 15" XGA
- 5-wire Resistive

Power Supply

- External 19V/65W power brick

Operating & Transit Environment

Operating Environment

- Temperature: 41 to 104° F (5 to 40° C)
- Relative Humidity: 10 to 90% (Non-condensing)

Transit Environment

- Temperature: -0.4 to 158° F (-18 to 70° C)
- Relative Humidity: 5 to 95% (Non-condensing)

Options

- VESA Mount
- Biometrics
- Panel PC
- iButton
- Wireless & Bluetooth

CONTACT **PAR** FOR MORE INFORMATION



www.partech.com